



## DI Floor Module

### Features

- Self-contained Compact Process Utilities Modules™ allow dense packing of the pre-fabricated utilities
- Boxes mount within the floor and are walkable, making valuable floor space available for maintenance clearance and egress requirements
- Single point of connections for facility supply and return
- Piping constructed with high quality materials
- +GF+ component standardization simplifies maintenance, hook-up and operation
- Available in 2' x 2' or 2' x 4'
- Pre-engineered to be compatible with all raised floor systems
- Modules can be quickly disconnected and relocated with the manufacturing tool to a different location
- Customized supply/return outlet tap size available

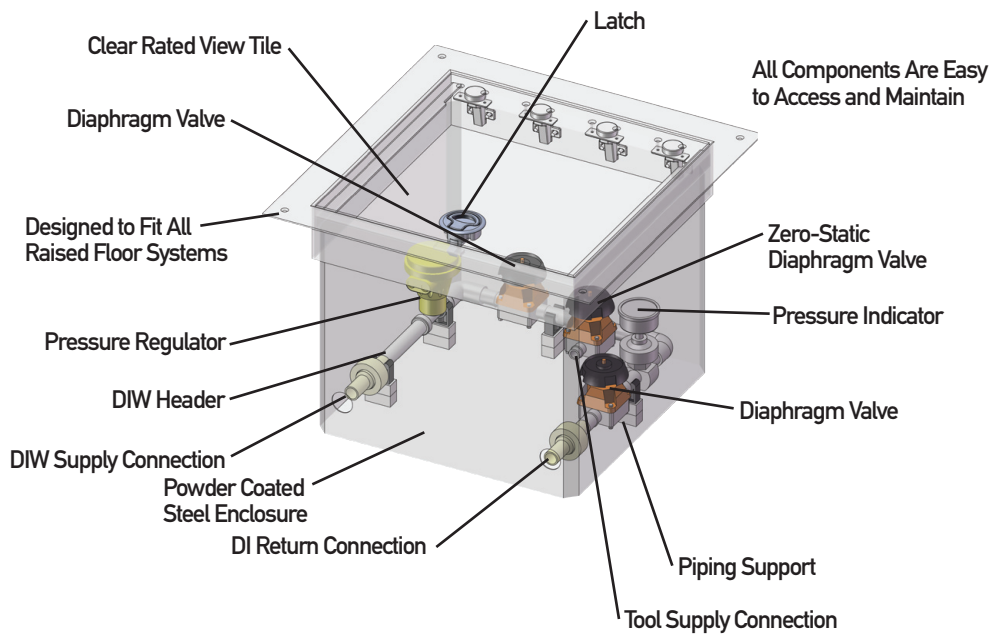

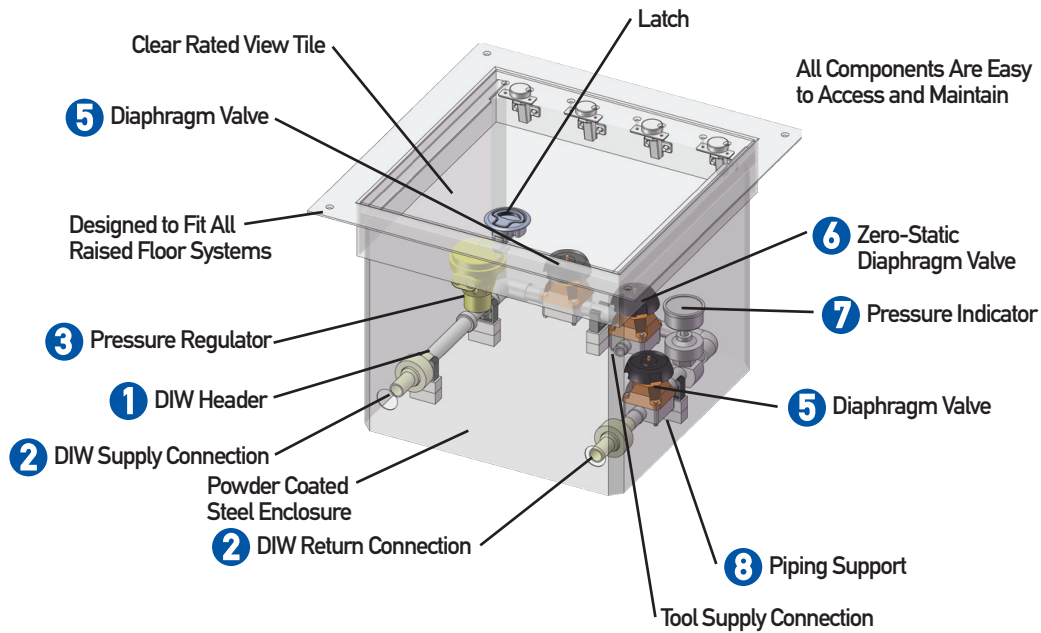

Part Number	Description	Quantity
1	PVDF Header - S/R DIW GF+ PVDF Header	1
2	DI - End +GF+ Union IR 728518507 or equivalent	2
3	DI - PRV Type V782 +GF+ Pressure Regulator or equivalent	1
4	DI - Flowmeter (optional) +GF+ 3-7001-M1 Digital Flowmeter or equivalent	1
5	DI - DIA +GF+ Diaphragm Valve Type 315 or equivalent	2
6	DI - Zero-Static Valve +GF+ Zero-Static Diaphragm Valve Type 319 or equivalent	1
7	PI - ASH Ashcroft Back Mount Pressure Gauge (0-160psig)	1
8	DI - SUP PVDF Piping Clip, Support	5

### Available Options

- Model Size: 2' x 2' or 2' x 4'
- Piping Material: PVDF
- Raised Floor Type: Dawtech, Tate, etc.
- Header Inlet Size: 1/2" - 2"
- Header Inlet Type: Union, NPT, Flange
- End Tap Size: 1/2", 3/4", 1"
- End Tap Type: Union, Flange



340 Avenue D, Suite #40  
Williston, VT 05495 USA